

# Depth Micrometer

## SERIES 128


### Technical Data

Accuracy:  $\pm 3\mu\text{m}$  ( $\pm .00015''$ ) for micrometer head feed  
 Graduation: 0.01mm or .001"  
 Flatness of reference face: 1.3 $\mu\text{m}$  (.00005") for 63.5mm (2.5") width base, 2 $\mu\text{m}$  (.00008") for 101.6mm (4") width base  
 Flatness of measuring rod face: 0.3 $\mu\text{m}$



### FEATURES

- $\varnothing 4\text{mm}$  measuring spindle.
- Measuring spindle lock.
- Carbide-tipped measuring spindle model is available.
- Ratchet stop provides constant force.

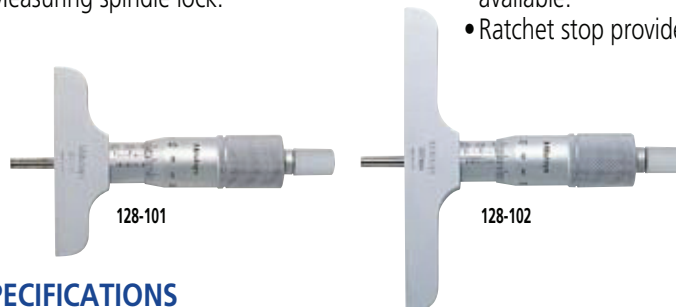

### SPECIFICATIONS

Metric		
Range	Order No.	Base
0 - 25mm	<b>128-101</b>	63.5 x 16mm
0 - 25mm	<b>128-103*</b>	63.5 x 16mm
0 - 25mm	<b>128-102</b>	101.6 x 16mm
0 - 25mm	<b>128-104*</b>	101.6 x 16mm

\*with carbide-tipped measuring spindle


Inch		
Range	Order No.	Base
0 - 1"	<b>128-105</b>	2.5" x .63"
0 - 1"	<b>128-106</b>	4" x .63"



(Refer to page VIII for details.)

### Technical Data

Block pitch accuracy:  $\pm(1+L/150)\mu\text{m}$ ,  
 L = Length to check (mm)  
 Anvil block accuracy:  $\pm 0.5\mu\text{m}$




# Depth Micro Checker

## SERIES 515

### FEATURES

- The Depth Micro Checker is designed to check and help set the range-end points of a depth micrometer.

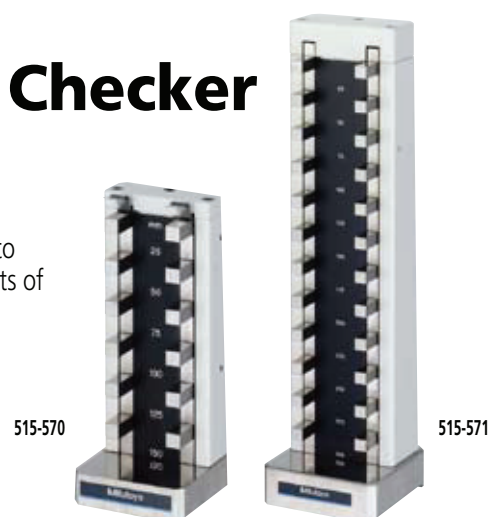

### SPECIFICATIONS

Metric		
Range	Order No.	Reference checking lengths available
0 - 150mm	<b>515-570</b>	25, 50, 75, 100, 125, 150mm
0 - 300mm	<b>515-571</b>	25, 50, 75, 100, 125, 150, 175, 200, 225, 250, 275, 300mm

Inch		
Range	Order No.	Reference checking lengths available
0 - 6"	<b>515-575</b>	1", 2", 3", 4", 5", 6"

### DIMENSIONS

